

HI-POWERMAXX2-XL

OVERVIEW

The Hi-PowerMaxx2-XL is a battery back up unit specifically designed for pump applications to ensure they can still operate should there be a power outage.

- It can run 2 x D10 or 501 foul water pumps (not simultaneously) without mains power for up to 19 days based on 10 cycles per day.
- 1 or 2 pumps are directly fed through the Hi-PowerMaxx2-XL.
- If a power failure occurs, the duty pump will draw power from the Hi-PowerMaxx2-XL which will have been fully charged during normal operation.
- The Hi-PowerMaxx2-XL will automatically recharge when mains power returns.
- Dynamic Polling (DyPol) enables the Hi-PowerMaxx2-XL to achieve extended backup times by dynamically requesting if the equipment requires backup power and alternating between a state of hibernation, request and supply.
- The digital display shows status and comprehensive fault codes, whilst the internal log captures and records critical events.
- The user menu function allows you to locally reset the battery life indicator.
- The Hi-PowerMaxx2-XL can operate as a stand alone unit or can be used in conjunction with a Rego1 or an AlertMaxx2.
- Data from the Hi-PowerMaxx2 can be shared with the AlertMaxx2 or Rego1 when connected to Wi-Fi.



TECHNICAL DATA

Product Code	HiPMX2XL
Size (without cable glands)	632mm x 425mm x 300mm
Weight (without battery installed)	15kg
Weight (with battery installed)	86.5kg
Mains supply	200-250V AC (50Hz)
Internal battery	24V - 5x22Ah = 110Ah
Power (standby)	<3W
Power (charging)	75W
Inverter	3000W P1
Visual Display	2 x 7 segment
Operating temperature	5-35 °C
Relative Humidity	<80%
Feeds	1 or 2 (13A non-switched)
Devices	1 or 2 pumps (cannot provide together)

*DyPol stands for Dynamic Polling, this features enables the Hi-PowerMaxx2-XL to achieve extended backup times, by dynamically requesting if the equipment requires backup power and alternating between a state of hibernation, request and supply.

WARRANTY

Hi-PowerMaxx2-XL is offered with a 24 month component warranty. This warranty covers any defects in workmanship, construction or material. This warranty does not cover, defects caused by incorrect installation, installer error, abnormal working conditions, misuse or neglect.

HEALTH & SAFETY

In order to minimise the risk of ill health or accidents when installing and/or servicing pump chambers and associated accessories, workers must be fully trained and competent. The following guidelines will help safeguard matters:




- Assessing the risk and working in accordance with the control measures identified.
- Ensure electrical power to the equipment is isolated before carrying out installation or maintenance.
- A suitable first aid kit must be close to hand.
- The electrical installation must comply with the requirements of BS 7671:2018 'Requirements for Electrical Installations' incorporating the latest amendments



HI-POWERMAXX2-XL



TECHNICAL DRAWINGS (MM)

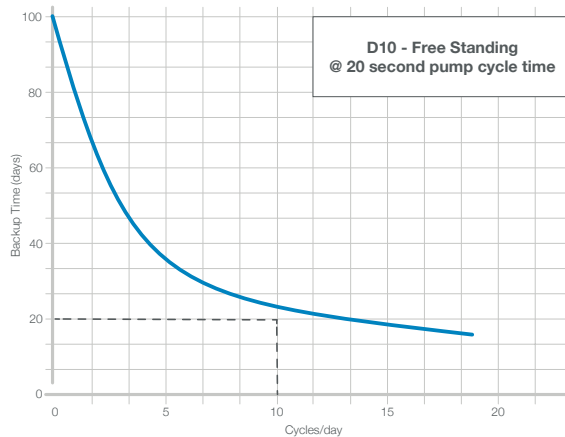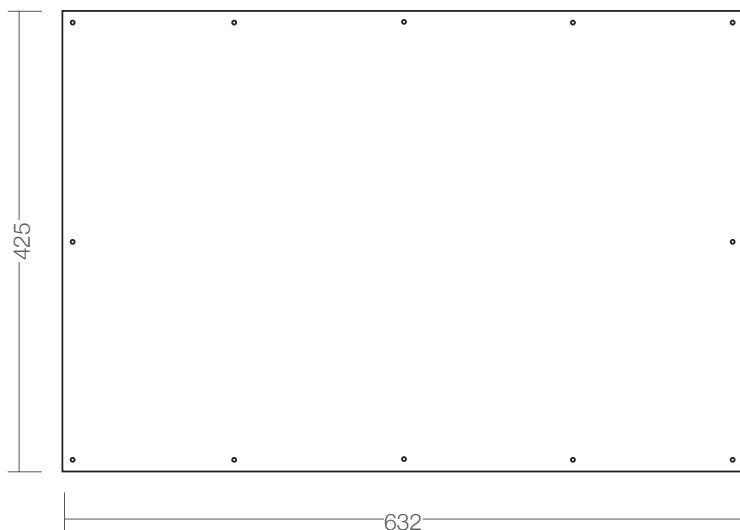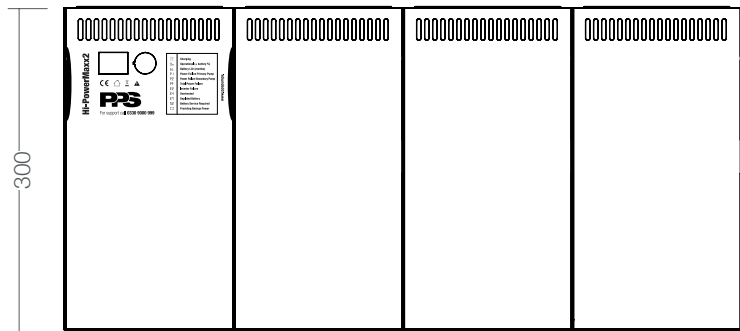

Mean average cycles/day = 10. Sample taken from 120 remote monitored ground water pump stations.