



ALERTMAXX2 (SEU2)

WI-FI CONNECTION GUIDE

The SEU card can only connect to **802.11 b/g/n** networks on the 2.4 GHz frequency band. The SEU cannot connect to 'AC' or 5 GHz networks.

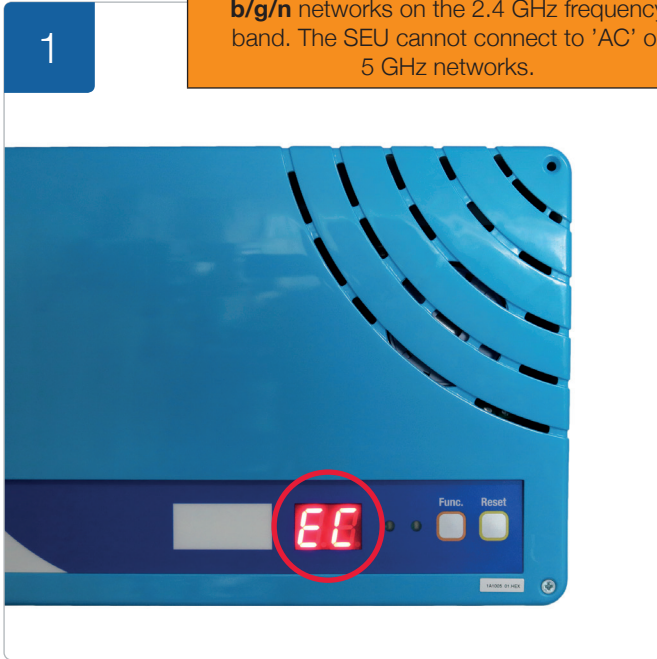


The AlertMaxx2 will show 'EC' when the unit has lost connection to the internet. Follow this guide if the Wi-Fi name, password or internet provider has changed.

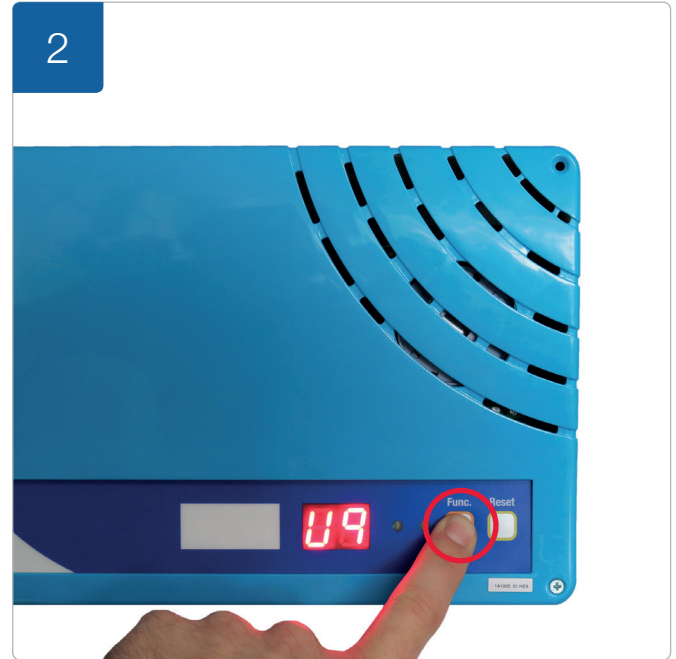

Press and hold the 'FUNC' button until the screen displays 'U9'. Upon release at 'U9', the unit will display 'C0'



'C0' will automatically change to 'C1' to indicate the Wi-Fi configuration process has started.

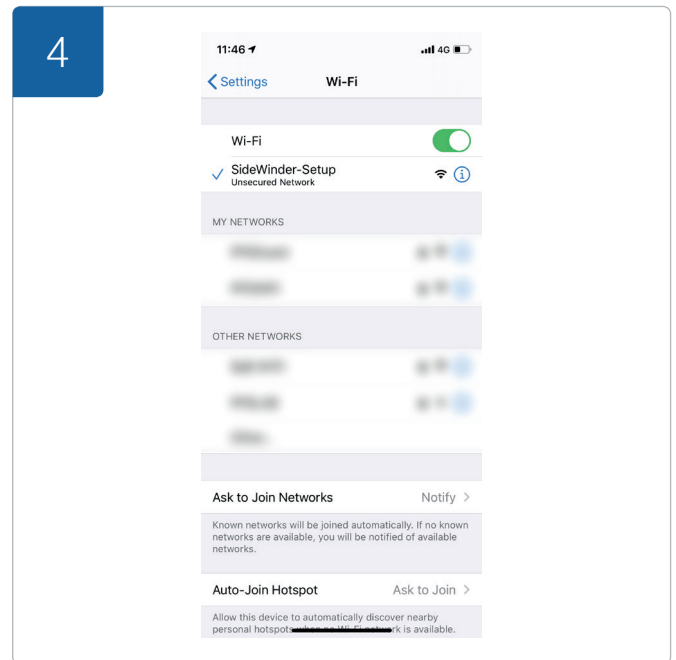


Using a Wi-Fi enabled device such as a mobile phone, open the Wi-Fi network search function and connect to 'SideWinder-Setup'.

ALERTMAXX2 (SEU2)

WI-FI CONNECTION GUIDE




After connecting to SideWinder-Setup, the unit will show a 'C2' indicating you have successfully connected your mobile device to the unit.

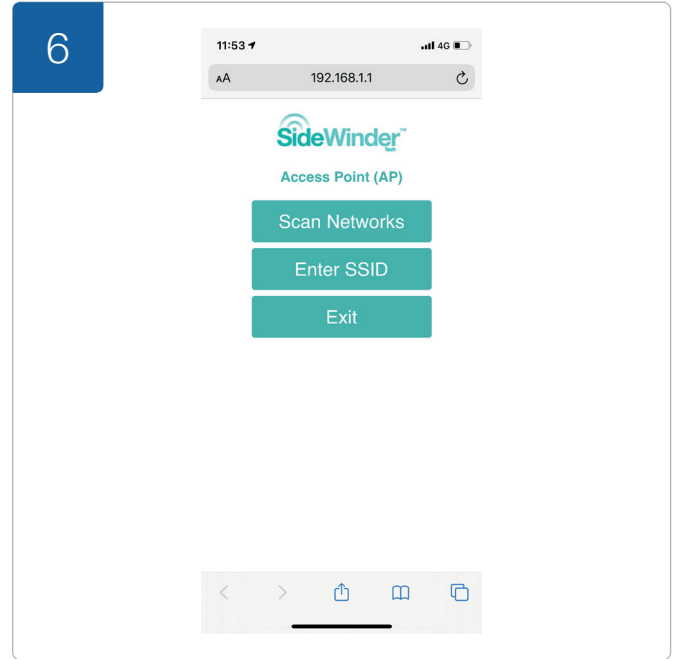

Open the web browser on your mobile device and enter **192.168.1.1** into the address bar and click go, this will take you to the SideWinder setup page and a 'C3' will show on the unit. Click '**Scan Networks**'.



Unit will show 'C4'. Click on your Wi-Fi network name from the list provided (sorted in signal strength, strongest at the top).

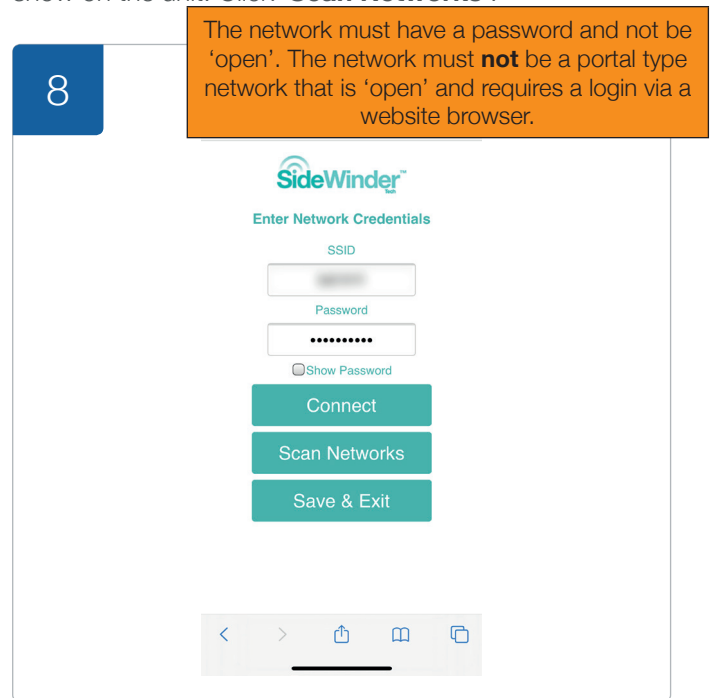


Enter the corresponding password associated with your chosen network. Click '**Connect**', the unit will show 'C5'.

ALERTMAXX2 (SEU2)



WI-FI CONNECTION GUIDE

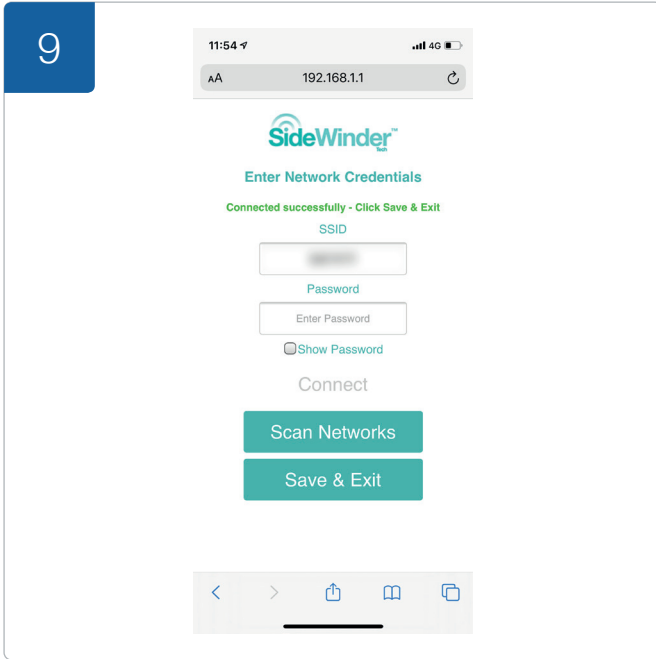

The unit should now be connected to the internet. Click **'Save & Exit'** to close the setup page and finish the connection.



Once the web browser displays this message, close the internet page.



The unit will now display **'CC'** to indicate the configuration has been successful.



The unit will flash the blue LED to indicate transmission of data and no code will be displayed on the screen.